


Our line of commercial hot water recirculating storage tanks are available in 80 and 119 US gallon models, jacketed and insulated or bare and enamel painted. Manufactured with ease of installation in mind.

## Features

- Glass-lined tank to protect against corrosion
- Threaded openings - for thermometer, relief valve, recirculation lines, aquastat and drain valve
- Magnesium anode(s)
- 150 psi working pressure
- Insulated models use high density fiberglass insulation to reduce costly heat loss; non-sagging and vermin-proof

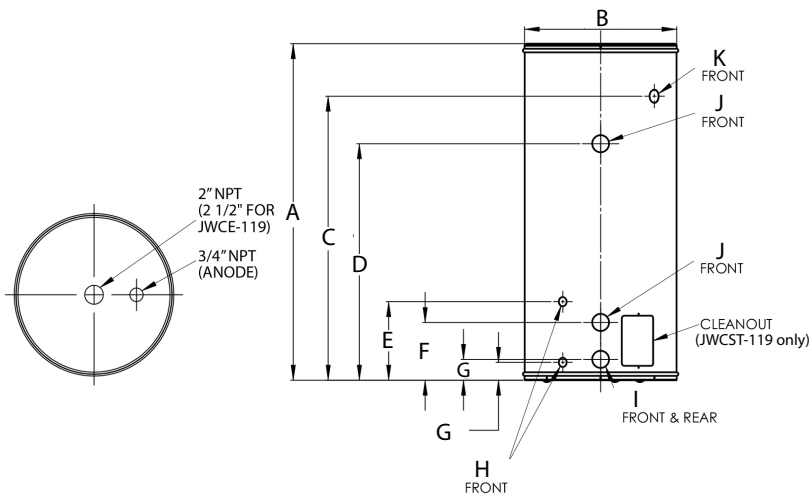

JWCST - Jacketed model shown

*(Please note that actual locations of openings may vary depending on model)*

DIMENSIONS & SHIPPING WEIGHT													
Model	Capacity USG (L)	A IN (CM)	B IN (CM)	C IN (CM)	D IN (CM)	E IN (CM)	F IN (CM)	G IN (CM)	H IN	I IN	J IN	K IN	Approximate Shipping Weight LBS (KG)
JWCST-80	80 (303)	62 ¼ (158)	23 ¼ (59)	N/A	44 ½ (113)	N/A	16 (41)	3 ⅝ (9)	N/A	2 NPT	2 NPT	2 NPT	236 (137)
JWCE-80 (Bare Tank)	80 (303)	61 ½ (156)	20 (51)	58 (147)	46 ¼ (117)	16 (41)	7 (18)	3 ¼ (8)	3/4 NPT	2 NPT	2 NPT	2 NPT	170 (77)
JWCST-119	119 (454)	62 (157)	29 ⅜ (75)	54 (138)	42 (107)	15 (38)	11 (28)	4 ⅞ (10)	3/4 NPT	2 NPT	2 NPT	1 NPT	320 (145)
JWCE-119 (Bare Tank)	119 (454)	64 ⅜ (164)	24 ¼ (62)	53 ⅞ (137)	34 ½ (88)	15 ½ (39)	7 (18)	3 ½ (9)	3/4 NPT	2 ½ NPT	2 ½ NPT	2 ½ NPT	287 (130)

## WARRANTY

5 Year Limited Tank Warranty\*

1 Year Limited Parts Warranty

Consult installation manual for terms and conditions or visit [www.johnwoodwaterheaters.com](http://www.johnwoodwaterheaters.com) for more information.

\*1 Year Limited Tank Warranty on Bare Tanks

For Technical Information/Warranty:  
Call 1-888-479-8324 or email [techsupport@hotwater.com](mailto:techsupport@hotwater.com)  
[www.johnwoodwaterheaters.com](http://www.johnwoodwaterheaters.com)