



- NOTES:
1. MATERIALS OF CONSTRUCTION
 1. VESSEL AND PIPING: CARBON STEEL AND CAST IRON
 2. JACKET: STAINLESS STEEL AND PAINTED STEEL
 2. PRESSURE VESSEL BUILT IN ACCORDANCE WITH ASME SECTION IV AND CARRIES AN "H" STAMP
 3. MAXIMUM ALLOWABLE WORKING PRESSURE UP TO 150PSI
 4. BOILER IS UL LISTED TO STANDARD 834
 5. FOR EWx150- EWx240 208V/3, 240V/3, 480V/3, & 600V/3
 6. BACNET IP AND MSTP, MODBUS RS485, AND 4-20 mA REMOTE SET POINT STANDARD
 7. REFER TO THE INSTALLATION AND OPERATION MANUAL FOR MORE INFORMATION


Center of Gravity (in)		
Length	Width	Height
17.6	12.2	26.4

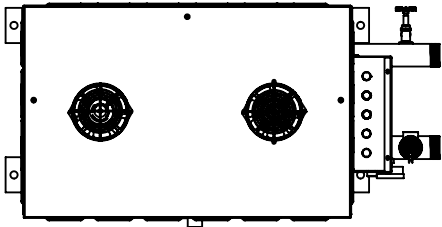


TOP

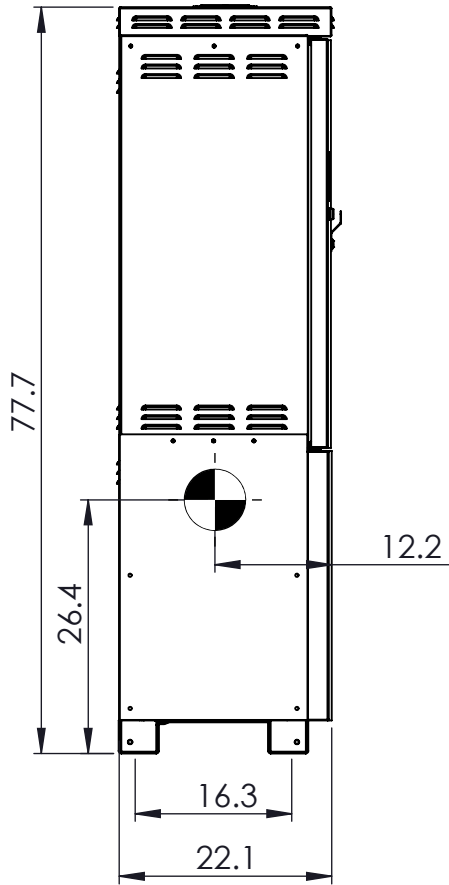


LEFT

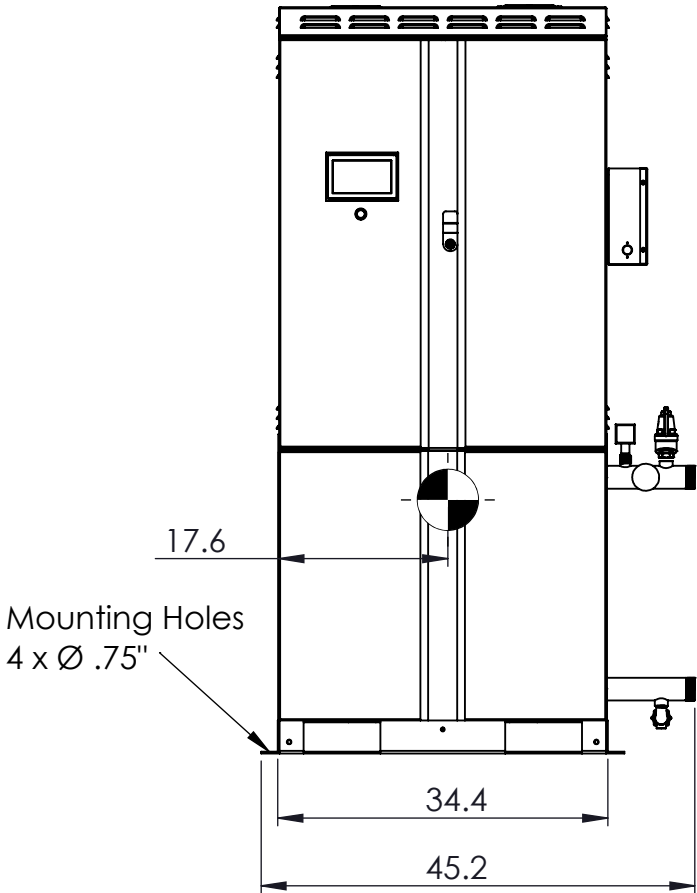

FRONT

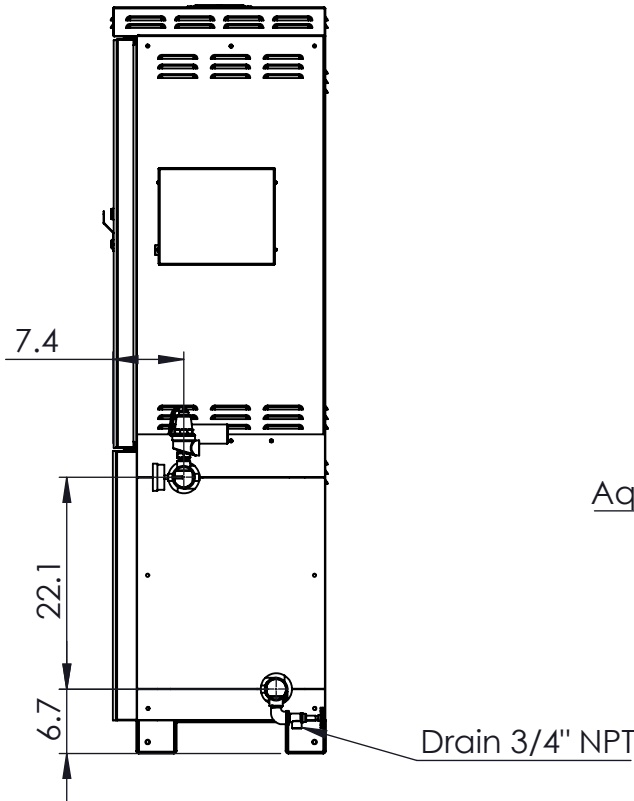


RIGHT

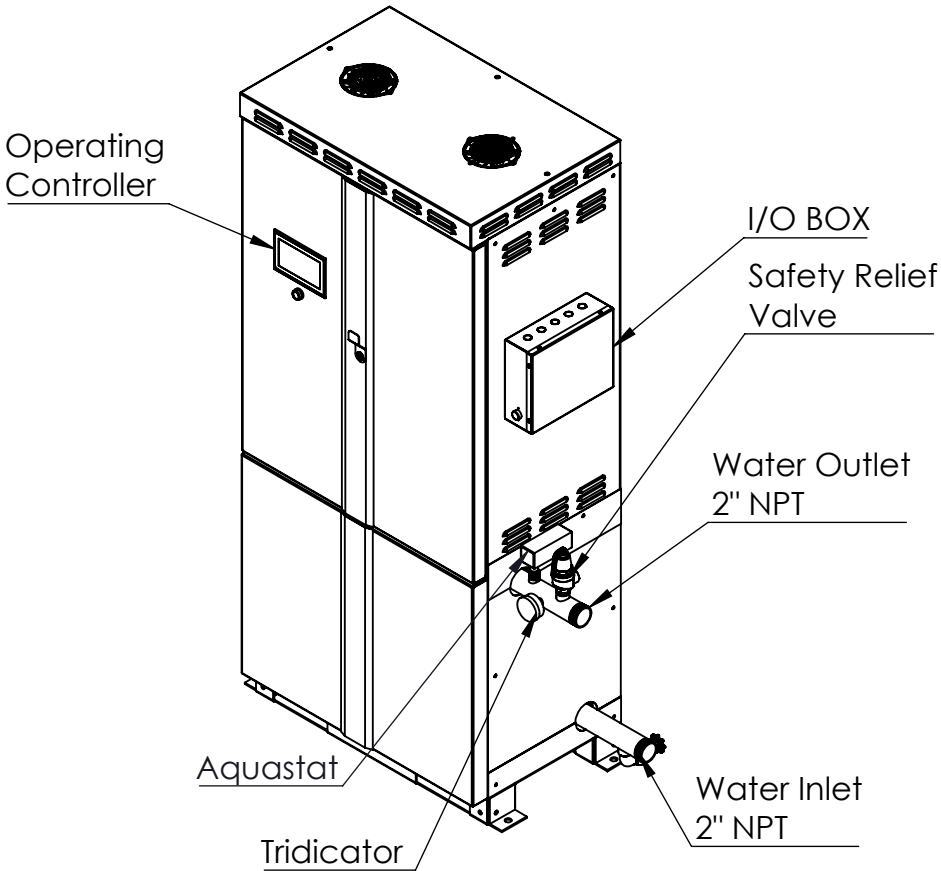

DIMENSIONS ARE SHOWN IN INCHES [CENTIMETERS]
TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
X.XX X.XXX X.XXXX ANGULAR FINISH
±.12 ±.031 ±.0156 ±1.0° 250
REMOVE AND DEBURR SHARP EDGES AND CORNERS
ALL DIMENSIONS ARE AFTER FINISH OR PLATING
REFERENCE DIMENSIONS ARE SHOWN IN PARENTHESES ()
CRITICAL DIMENSIONS ARE SHOWN IN

THIS DRAWING AND/OR SPECIFICATIONS ARE THE PROPERTY OF DIVERSIFIED HEAT TRANSFER INC. THIS CONFIDENTIAL AND PROPRIETARY INFORMATION SHALL NOT BE USED, COPIED OR REPRODUCED IN ANY MEANS AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION FROM OWNER.

THIRD ANGLE PROJECTION



DWG. SCALE

1:20

MATERIAL SPEC:



439 MAIN RD. TOWACO NJ 07082
PHONE: (800) 221-1522 FAX: (718) 386-7809

TITLE EWx150-EWx240 ELECTRIC WATER BOILERS

DRAWN BY

JH

DATE

11/19/25

DWG#

EWx150-EWx240

REV


A

CHECKED BY

SHEET 1 OF 2

NOTES:
1. SERVICE CLEARANCES TO BE IN CONFORMANCE TO NEC REQUIREMENTS. ALLOW A MINIMUM OF 36" CLEARANCE IN FRONT OF DOORS FOR SERVICING OF HEATING ELEMENTS. RECOMMENDED 24" CLEARANCE FOR OTHER SIDES OF BOILER FOR SERVICING.
2. MINIMUM 1" CLEARANCE TO ALL COMBUSTIBLE MATERIALS

Service Clearance Requirements

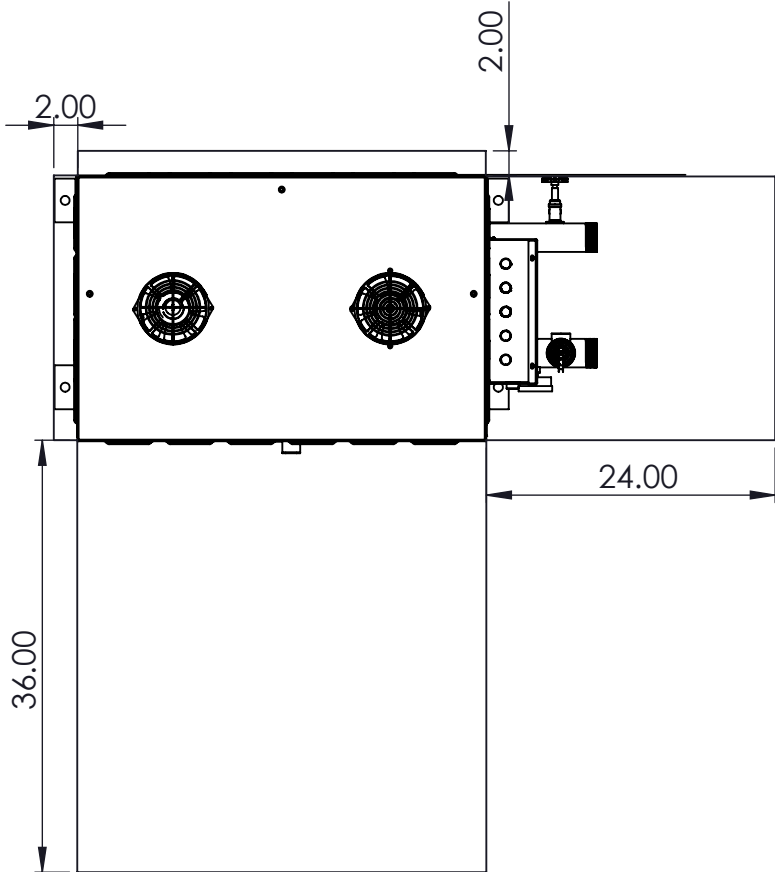

Boiler	kW	Elements	Voltage	Amp Draw	MBH	Min Flow (GPM)	Max Flow (GPM)
EWx150	150	5 x 30kW	208	417	511.8	8	82
			240	361			
			480	181			
			600	145			
EWx180	180	6x 30kW	208	500	614.2	8	82
			240	434			
			480	217			
			600	173			
EWx210	210	7x 30kW	208	584	716.5	8	82
			240	506			
			480	253			
			600	202			
EWx240	240	8x 30kW	208	667	818.9	8	82
			240	578			
			480	289			
			600	231			

Boiler	Dry Weight (LBS)	Wet Weight (LBS)	Total Volume (Gal)	Boiler Headers Size (NPT)	Drain Size (NPT)	Safety Valve Outlet Size (NPT)
EWx150	880	1000	14.9	2"	0.75"	1.25" (50,60,75 PSI)
EWx180	895	1015				1" (100 PSI)
EWx210	910	1030				0.75" (125,150 PSI)
EWx240	925	1045				

DIMENSIONS ARE SHOWN IN INCHES [CENTIMETERS]
TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
X.XX X.XXX X.XXXX ANGULAR FINISH
± .12 ± .031 ± .0156 ±1.0° 250
REMOVE AND DEBURR SHARP EDGES AND CORNERS
ALL DIMENSIONS ARE AFTER FINISH OR PLATING
REFERENCE DIMENSIONS ARE SHOWN IN PARENTHESES ()
CRITICAL DIMENSIONS ARE SHOWN IN

THIS DRAWING AND/OR SPECIFICATIONS ARE THE PROPERTY OF DIVERSIFIED HEAT TRANSFER INC. THIS CONFIDENTIAL AND PROPRIETARY INFORMATION SHALL NOT BE USED, COPIED OR REPRODUCED IN ANY MEANS AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION FROM OWNER.

SUSSMAN
ELECTRIC BOILERS
439 MAIN RD. TOWACO NJ 07082
PHONE: (800) 221-1522 FAX: (718) 386-7809

TITLE EWx150-EWx240 ELECTRIC WATER BOILERS

THIRD ANGLE PROJECTION

DWG. SCALE 1:16

MATERIAL SPEC:

DRAWN BY JH

CHECKED BY

NAME

DATE 11/19/25

DWG# EWx150-EWx240

SHEET 2 OF 2

REV A